




Light Weight Led Indoor Display 3mm Led Screen With MBI5124 / ICN 2038S Driving IC

Our Product Introduction


Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-FD 3
- Minimum Order Quantity: 1 Sq.m
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 15 working days
- Supply Ability: 3000 Sq.m / month

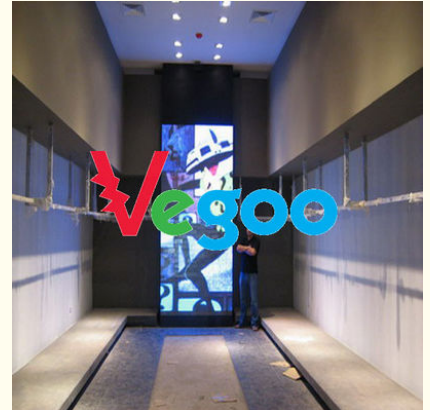

Product Specification

- Product Name: P3 Indoor Full Color LED Display
- Certification: CE/ROHS/FCC
- Pixel Configuration: 1R1G1B/SMD2121 Black Lamp
- Density: 111,111pixel/m2
- Moduel Size(L×W)mm: 192mm×192mm
- Brightness: 800cd/
- Contrast: 1000:1
- Highlight: indoor advertising led display,
indoor full color led display screen

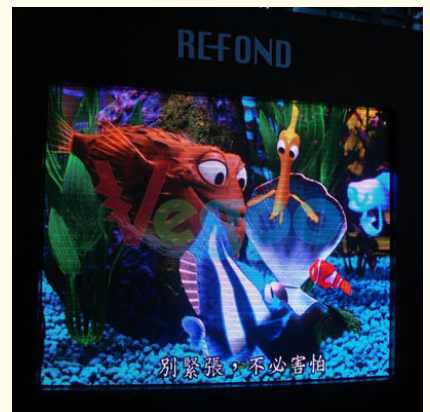

for more products please visit us on hdled-display.com

Product Description

Light weight P3 Indoor Full color LED Display with MBI5124 or ICN 2038S Driving IC

Quick Detail:

1. High&low brightness recession rate;
2. Pure&rich colors;
3. Unique mechanical structure design;
4. Light weight cabinet & Fast dismantle&installation;

P3 Indoor Full color LED Display Specification:

NO:	Product Name	Specification
1	Pixel Pitch	3mm
2	Pixel Configuration	1R1G1B/SMD2121 Black lamp
3	Density	111,111pixel/m2
4	Moduel Size(L×W)mm	192mm×192mm
5	Cabinet Size(L×W×H)mm	576mm×576mm×90mm
6	Module Resolution	64×64
7	Cabinet Resolution	192×192
8	Driving Method	1/32 Scan
9	Driving IC	MBI5124 or ICN 2038S
10	Brightness	800cd/
11	Contrast	1000:1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 800W
14		Average power: 200W
15	Module Weight	0.25kg
16	Color Temperature	9500K—11500K
17	Horizontal Viewing Angle	140°
18	Vertical Viewing Angle	140°
19	Signal Processing	10 or 14bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m,Multimode500m,Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>1920Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65
30		Storage : -40 - 85
31	Environment Temperature	-30 to 60 ; humidity Rh10% to 95%
32	Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
33	Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
34	Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
35	Power Supply	AC 110-220V
36	Protection	dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

Applications :

Sports, advertising, traffic, entertainment, stage, events, stadium, train station, bus station, shopping center, airport, exhibitions, car shows, fashion shows, concerts, ceremonies, etc

Services Before-sale:

Set a special telephone line to resolve the confusion from clients and supply free technology services by telephone. Consider the demands of clients carefully , study the situation of the installation condition , Team up the related staff and workers promptly , give clients design program details to help them choose the products which they wanted as soon as possible

Service In - sales :

Try the best to meet the reasonable demands by clients Provisional changed .
Keep close touch with the clients during the period if installation .
Cooperate friendly with the clients, satisfy the clients with the best quality of led display .



Shenzhen Weigu Electronic Technology Co., Ltd.



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,
Shenzhen, China