

High Resolution Thin P3 Indoor Full Color LED Display For Shopping Malls

Our Product Introduction


Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-FD 3
- Minimum Order Quantity: 1 Sq.m
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 15 working days
- Supply Ability: 3000 Sq.m / month



Product Specification

- Product Name: P3 Indoor Full Color LED Display
- Certification: CE/ROHS/FCC
- Pixel Pitch: 3mm
- Pixel Configuration: 1R1G1B/SMD2121 Black Lamp
- Brightness: 800cd/
- Contrast: 1000:1
- Highlight: indoor advertising led display,
indoor full color led display screen

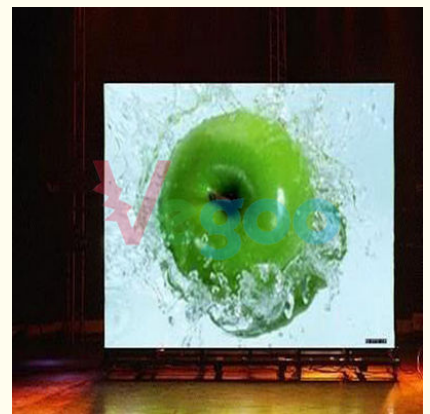

for more products please visit us on hdled-display.com

Product Description

High resolution P3 Indoor Full color LED Display for Shopping Malls

Quick Detail:

1. Super lighter and thinner;
 2. Easy connection and disassembling;
 3. Wide application, good for rental or fixed installation;
 4. High resolution and high frequency dynamic image.
- Video Led indoor P4 full color display/SMD full color led display

Applications:

Shopping Malls
Music Venues and Concerts
Large Offices
Theater and Arts
TV Shows
Car Shows

P3 Indoor Full color LED Display Specification

Product Name	Specification
Pixel Pitch	3mm
Pixel Configuration	1R1G1B/SMD2121 Black lamp
Density	111,111pixel/m2
Module Size(L×W)mm	192mm×192mm
Cabinet Size(L×W×H)mm	576mm×576mm×90mm
Module Resolution	64×64
Cabinet Resolution	192×192
Driving Method	1/32 Scan
Driving IC	MBI5124 or ICN 2038S
Brightness	800cd/
Contrast	1000:1
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 800W
	Average power: 200W
Module Weight	0.25kg
Color Temperature	9500K—11500K
Horizontal Viewing Angle	140°
Vertical Viewing Angle	140°
Signal Processing	10 or 14bit
Grey Processing	1024×1024×1024 16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
	Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65
	Storage : -40 - 85
Environment Temperature	-30 to 60 ; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)

Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 110-220V
Protection	dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

Our service

1. Your inquiry related to our products or price will be replied in 2hrs
2. OEM customized products
3. 2 years warranty
4. Complaint respond period not exceed 24 hours; maintenance guidance and problem solution supplied in 48 hours.
5. Free technician training..
6. Top quality+Reasonable price+Responsible After Service=Successful & Win



Shenzhen Weigu Electronic Technology Co., Ltd.



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,
Shenzhen, China