



Indoor / Outdoor Rental / Fixed Flexible LED Screen P4 Led Video Wall

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-SD P4
- Minimum Order Quantity: 1 sq.m
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 12-15 days



Product Specification

- Product Name: Flexible LED Screen
- Pixel Pitch: 4mm
- Pixel Configuration: 1R1G1B/SMD2121 Black Lamp
- Density: 62,500 Pixel/m²
- Cabinet Size(L×W×H)mm: 512mm×512mm×90mm
- Module Resolution: 64×32
- Driving Method: 1/16 Scan
- Contrast: 1000:1
- Highlight: flexible led display, flexible led panel



for more products please visit us on hdled-display.com

Product Description

indoor & outdoor rental & fixed Soft Flexible LED Screen

Description:

IP 43-66, indoor & outdoor rental & fixed project available
 Single led pixel replacement --- easy to maintain
 Tin soldered wires --- stable signal and power transferring
 Very stable performance, few aftersale problems
 Easy to maintain, single led dot replaceme

P4 Indoor Full color LED Display Specification:

Product Name	Specification
Pixel Pitch	4mm
Pixel Configuration	1R1G1B/SMD2121 Black lamp
Density	62,500 pixel/m ²
Module Size(L×W)mm	256mm×128mm
Cabinet Size(L×W×H)mm	512mm×512mm×90mm
Module Resolution	64×32
Cabinet Resolution	128×128
Driving Method	1/16 Scan
Driving IC	MBI5124 or ICN 2038S
Brightness	1000cd/
Contrast	1000:1
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 610W
	Average power: 240W
Module Weight	0.2kg
Color Temperature	9500K—11500K
Horizontal Viewing Angle	140°
Vertical Viewing Angle	140°
Signal Processing	10 or 14bit
Grey Processing	1024×1024×1024 16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
	Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65
	Storage : -40 - 85
Environment Temperature	-30 to 60 ; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 110–220V
Protection	dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

Why choose us ?

OEM & ODM available
 Professional manufacturer

100% QC inspection before shipping
First-class led chip and IC
Competitive price as stocks and lower marketing expense

Products exchanged or returned :


we supply our products strictly according to the contract list , if the quantity or specification doesn't meet our contract list, the buyer can give objections within 3 days after received the products , we'll exchanged after company confirmed.

Casual damage situation:

We can provide corresponding fittings without extra fee when improper operation or unexpected artificial damaged arise .

Over Guarantee time :

You only have to pay maintenance cost such as labor costs , spare parts costs and round-trip costs !

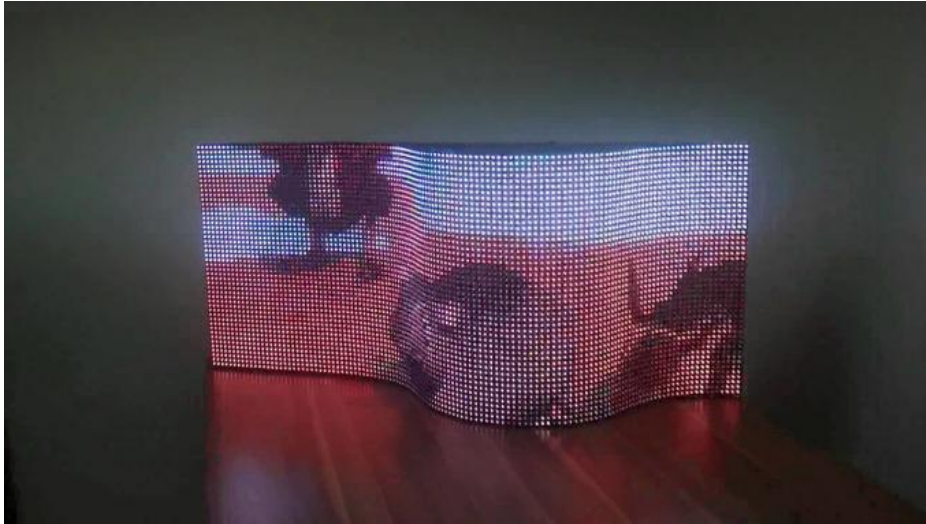

Vegoo 威固电子 Shenzhen Weigu Electronic Technology Co., Ltd.

☎ 86-15118043086 ✉ Linda@vegooled.com 🌐 hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,
Shenzhen, China