




P4mm Stage Background LED Screen Flexible Led Panel For Advertisement

Our Product Introduction


Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-SD P4
- Minimum Order Quantity: 1 sq.m
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 12-15 days

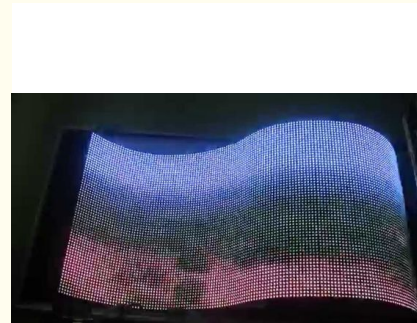

Product Specification

- Product Name: Flexible LED Screen
- Pixel Configuration: 1R1G1B/SMD2121 Black Lamp
- Density: 62,500 Pixel/m2
- Module Size(L×W)mm: 256mm×128mm
- Module Resolution: 64×32
- Cabinet Resolution: 128×128
- Driving Method: 1/16 Scan
- Brightness: 1000cd/
- Highlight: flexible led video wall, flexible led panel

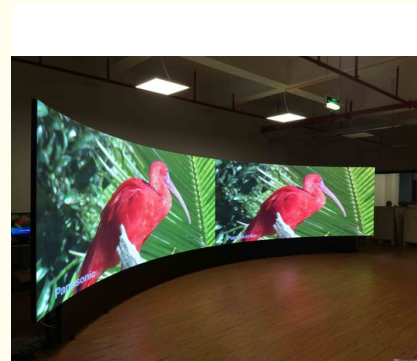

Product Description

Stage background Soft Flexible LED Screen for advertisement

Description:

Suit for advertisement, stage, stadium, exhibition, TV-Show, mansion video wall, shopping mall, banks, schools, bus station, airport, gym, market, factories, monitoring centers, hospitals, bars etc.

1. Video display for advertisement
2. Live broadcast for news, sport, concert...
3. Stage background
4. Information display for time, schedule, text
5. Dynamic display for logo, text, video

P4 Indoor Full color LED Display Specification:


Product Name	Specification
Pixel Pitch	4mm
Pixel Configuration	1R1G1B/SMD2121 Black lamp
Density	62,500 pixel/m ²
Module Size(L×W)mm	256mm×128mm
Cabinet Size(L×W×H)mm	512mm×512mm×90mm
Module Resolution	64×32
Cabinet Resolution	128×128
Driving Method	1/16 Scan
Driving IC	MBI5124 or ICN 2038S
Brightness	1000cd/
Contrast	1000:1
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 610W
	Average power: 240W
Module Weight	0.2kg
Color Temperature	9500K—11500K
Horizontal Viewing Angle	140°
Vertical Viewing Angle	140°
Signal Processing	10 or 14bit
Grey Processing	1024×1024×1024 16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
	Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65
	Storage : -40 - 85
Environment Temperature	-30 to 60 ; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 110–220V
Protection	dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

Flexible Full Color LED Display Competitive advantages

1. Strong supply ability: 6000 per month LED display production and standard products in stock for quick delivery;
2. Stable quality: Professionally supplied LED screen to over 100 countries and installed thousands projects in 11 years;
3. Innovation: According to customer's demands and save more time and cost on the installation, maintenance, and make sure more steady quality and easy operation.
4. Reasonable price: Profit back to customer for long term win-win cooperation;
5. Trusted service: Local cooperation distributors in Russia,Indonesia,India and Spain; 24/7 LED experts online support; LED engineer on-site support;

Customer Service

- 1) Guarantee Time: Within one year after delivery form factory
- 2) Maintenance Coverage : LED modules,Power supply ,Control system and other accessories (This warranty exclude accessories purchasing form other factory)
- 3) Maintenance Mode :
By returned maintenance , through express or by other way
- 4) Response time for maintenance :
 1. Return mode: after receiving the returned products, we will repaired them within 24 hours and send them back to the user;
 2. Telephone or internet mode: we will contact user within 2 hours after getting informations and give solution within 8 hours;
 3. On-site mode: (only for user inside china) after receiving maintenance request , we will respond within 48 hours to user in Guangdong province; 72 hours to user outside Guangdong province. In the case of some special conditions , problems could be solved on the basis of friendly negotiation between two parties.

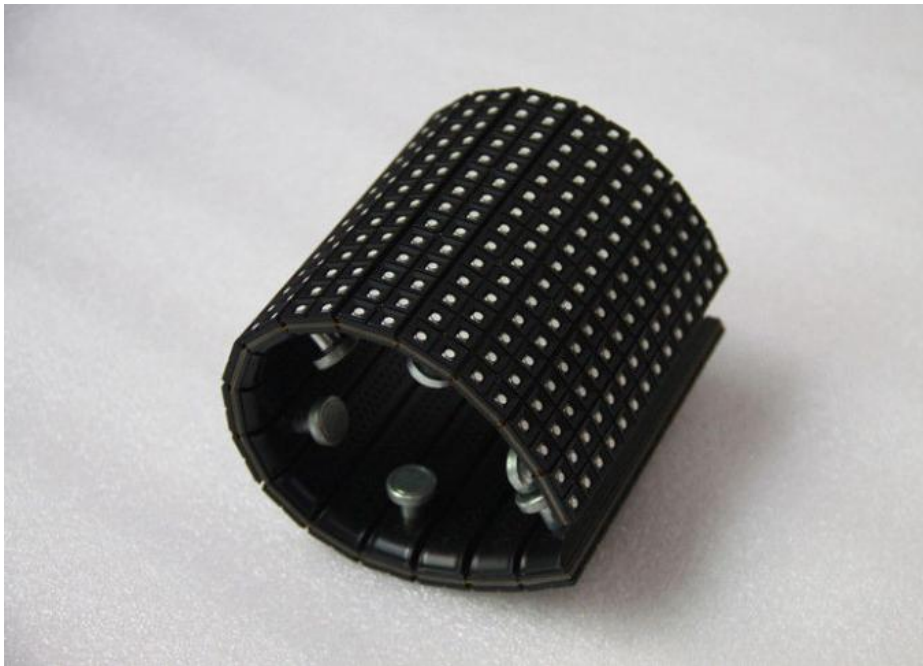

Vegoo  **Shenzhen Weigu Electronic Technology Co., Ltd.**

 86-15118043086

 Linda@vegooled.com

 hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,
Shenzhen, China