




Waterproof 20mm Outdoor Transparent Led Display Full Color 5500CD/

Our Product Introduction


Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-SD P20
- Minimum Order Quantity: 1 Sq.m
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 20-25 working days
- Supply Ability: 3000 Sq.m/ Month

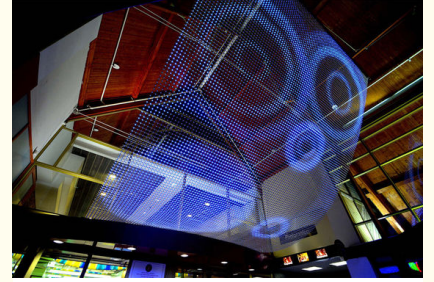

Product Specification

- Product Name: Outdoor Full Color LED Display
- Pixel Pitch: 20mm
- Pixel Configuration: 1R1G1B/DIP 346
- Density: 2,500 Pixel/m²
- Cabinet Size(L×W×H)mm: 960mm×320mm×90mm
- Module Resolution: 48×0.85
- Cabinet Resolution: 48×16
- Driving Method: 1 Scan
- Highlight: transparent led display, transparent led panel

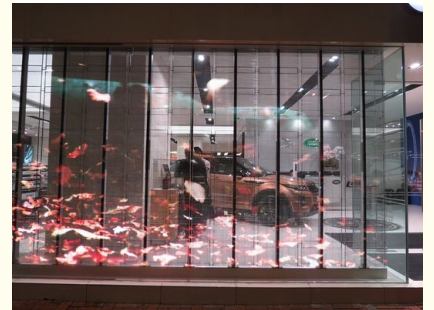

for more products please visit us on hdled-display.com

Product Description

P20 DIP 346 Outdoor Full color LED Display

Description:

1. Outdoor advertising LED display
2. High brightness, stable, durable
3. Waterproof, IP65
4. CE, RoHS, FCC certificate

P20 DIP 346 Outdoor Full color LED Display Specification

NO:	Product Name	Specification
1	Pixel Pitch	20mm
2	Pixel Configuration	1R1G1B/DIP 346
3	Density	2,500 pixel/m ²
4	Module Size(L×W)mm	960mm×17mm
5	Cabinet Size(L×W×H)mm	960mm×320mm×90mm
6	Module Resolution	48×0.85
7	Cabinet Resolution	48×16
8	Driving Method	1 Scan
9	Driving IC	MBI5124
10	Brightness	5500CD/
11	Contrast	1000:1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 600W
14		Average power: 450W
15	Cabinet Weight	18kg
16	Color Temperature	9500K—11500K
17	Horizontal Viewing Angle	140°
18	Vertical Viewing Angle	140°
19	Signal Processing	10 or 14bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable 100m, Multimode 500m, Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>1920Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65
30		Storage : -40 - 85
31	Environment Temperature	-30 to 60 ; humidity Rh10% to 95%
32	Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
33	Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
34	Operating System Platform	WindowsNT, Windows2000, WindowsXP, Windows7
35	Power Supply	AC 110-220V
36	Protection	waterproof, dustproof, high temperature prevention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

Perfect service after sale :

1) Guidance service: We can guide on line if customers have questions about the installation and usage.

For large project, we provide your engineer a week free training, or if customer could bear the relevant cost, our engineer can go to customer's country for on-site guidance.

2) Warranty period: 3 years after shipment.

3) Maintenance principles: response in time, solve problems as soon as possible and ensure the use.

4) Maintenance terms: In the Maintenance period, free of all maintenance charges. Under normal use and storage, our company will be responsible for the equipments. If there is any failure in product quality, our company will maintain and change the components for free. After Maintenance period, only charge the material costs fees free of manual work fees.



Vegoo 威固电子 **Shenzhen Weigu Electronic Technology Co., Ltd.**

☎ 86-15118043086

✉ Linda@vegooled.com

🌐 hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District, Shenzhen, China