


HD 10mm Led Display Outdoor Digital Signage Displays 960mm×960mm×130mm

Our Product Introduction

for more products please visit us on hdled-display.com


Basic Information

- Place of Origin: China
- Brand Name: Vgeoo
- Certification: Ce/ROHS/FCC/
- Model Number: VG-RD P10
- Minimum Order Quantity: 1 Sq.m
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 7 days

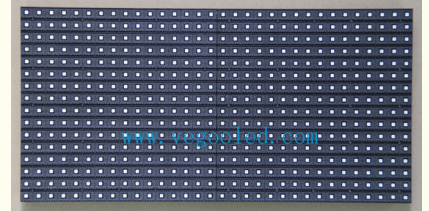

Product Specification

- Product Name: P10 Outdoor Full Color LED Display
- Pixel Pitch: 10mm
- Pixel Configuration: 1R1G1B/SMD3535
- Density: 10,000 Pixel/m²
- Moduel Size(L×W)mm: 320mm×160mm
- Driving IC: MBI5124 Or ICN 2038S
- Brightness: 7500CD /
- Contrast: 1000:1
- Highlight: **led display module, led screen module**

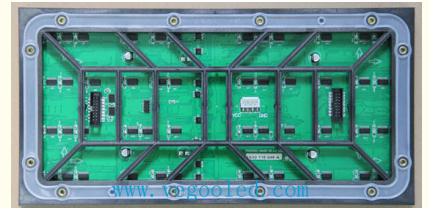

Product Description

P10 Outdoor Full color LED Display 960mm×960mm×130mm

Description:

Easy for assembling and connection with the connector added;

Easy for installation;

LED cabinet now design is iron material it would save much of your cost from make to Aluminum cabinet material;

adopt efficient optical fiber transmission system, effectively reduce the signal delay phenomenon, to assure the consistence of part of the game screen showing;

Internally installed power supplier; using the high light SMD 3in1 LED, with a better color combination, made the image more colorful;

P10 Outdoor Full color LED Display Specification

NO:	Product Name	Specification
1	Pixel Pitch	10mm
2	Pixel Configuration	1R1G1B/SMD3535
3	Density	10,000 pixel/m ²
4	Module Size(L×W)mm	320mm×160mm
5	Cabinet Size(L×W×H)mm	960mm×960mm×130mm
6	Module Resolution	32×16
7	Cabinet Resolution	96×96
8	Driving Method	1/ 2 Scan
9	Driving IC	MBI5124 or ICN 2038S
10	Brightness	7500CD /
11	Contrast	1000:1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 700W
14		Average power: 300W
15	Module Weight	0.28kg
16	Color Temperature	9500K—11500K
17	Horizontal Viewing Angle	140°
18	Vertical Viewing Angle	140°
19	Signal Processing	10 or 14bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m,Multimode500m,Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>1920Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65 °C
30		Storage : -40 - 85 °C
31	Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
32	Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
33	Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
34	Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
35	Power Supply	AC 85-264V
36	Protection	waterproof, dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

Customer Service

- 1) Guarantee Time: Within one year after delivery form factory
- 2) Maintenance Coverage : LED modules,Power supply ,Control system and other accessories (This warranty exclude accessories purchasing form other factory)
- 3) Maintenance Mode :
By returned maintenance , through express or by other way
- 4) Response time for maintenance :

1. Return mode: after receiving the returned products, we will repaired them within 24 hours and send them back to the user;

2. Telephone or internet mode: we will contact user within 2 hours after getting informations and give solution within 8 hours;

3. On-site mode: (only for user inside china) after receiving maintenance request , we will respond within 48 hours to user in Guangdong province; 72 hours to user outside Guangdong province, In the case of some special conditions , problems could be solved on the basis of friendly negotiation between two parties.



Shenzhen Weigu Electronic Technology Co., Ltd.



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,
Shenzhen, China