


1R1G1B / DIP 346 P10 Led Display Module Outdoor Led Panel 7500cd/


Basic Information

- Place of Origin: China
- Brand Name: Vgeoo
- Certification: Ce/ROHS/FCC/
- Model Number: VG-RD P10
- Minimum Order Quantity: 1 Sq.m
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 7 days

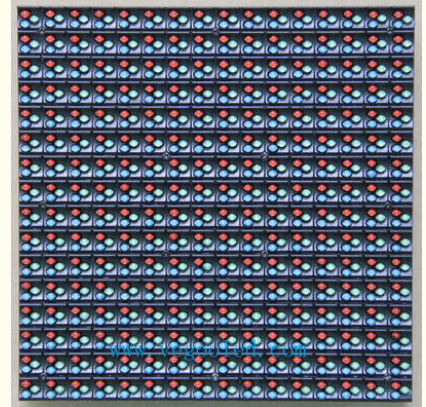

Product Specification

- Product Name: P10 Outdoor Full Color LED Display
- Pixel Pitch: 10mm
- Pixel Configuration: 1R1G1B/DIP 346
- Density: 10,000 Pixel/m²
- Brightness: 7500cd/
- Contrast: 1000:1
- Highlight: **led display module, led video module**

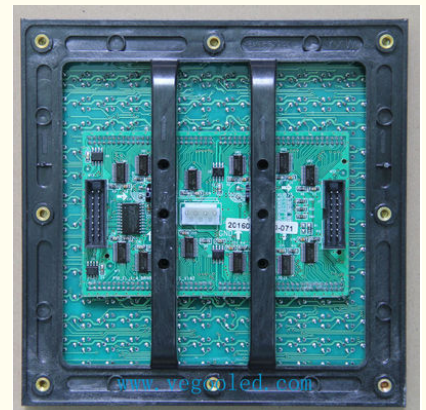

Product Description

1R1G1B/DIP 346 P10 Outdoor Full color LED Display

Description:

1. Long-term Brightness:
Automatic or manual adjustment of the brightness of the display.
2. Easy Installation & Using:
easy & simple installation interface and user friendly software to ensure the user friendly interface of the LED display screen system
3. Convenient Servicing:
Front and rear cabinet access makes the maintenance work very convenient and low cost to help you concentrate more time and energy on your main marketing promotion

P10 Outdoor Full color LED Display Specification

Product Name	Specification
Pixel Pitch	10mm
Pixel Configuration	1R1G1B/DIP 346
Density	10,000 pixel/m ²
Module Size(L×W)mm	320mm×160mm or 160mm×160mm
Cabinet Size(L×W×H)mm	960mm×960mm×130mm
Module Resolution	32×16
Cabinet Resolution	96×96
Driving Method	1/ 4 Scan
Driving IC	MBI5124
Brightness	7500cd/
Contrast	1000:1
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 850W
	Average power: 340W
Module Weight	0.5kg
Color Temperature	9500K—11500K
Horizontal Viewing Angle	140°
Vertical Viewing Angle	140°
Signal Processing	10 or 14bit
Grey Processing	1024×1024×1024 16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
	Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65
	Storage : -40 - 85
Environment Temperature	-30 to 60 ; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 110-220V
Protection	waterproof, dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

Services Before-sale:

Set a special telephone line to resolve the confusion from clients and supply free technology services by telephone.

Consider the demands of clients carefully , study the situation of the installation condition , Team up the related staff and workers promptly , give clients design program details to help them choose the products which they wanted as soon as possible

Service In - sales :

Try the best to meet the reasonable demands by clients Provisional changed .

Keep close touch with the clients during the period if installation .

Cooperate friendly with the clients, satisfy the clients with the best quality of led display .

Service After-sale:

Normal products have one year guarantee, and whole life maintenance, free charges . we just charge materials cost only if products out off guarantee.

You can down load and upgrade the related operating software of Led display freely from our company website , so as to resolve the problems when you use our led display .

Check the quality of appliance , do maintenance job and ask good suggestions form clients on a regular time schedule .



Vegoo 威固电子 **Shenzhen Weigu Electronic Technology Co., Ltd.**

☎ 86-15118043086

✉ Linda@vegooled.com

🌐 hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,
Shenzhen, China