P6 Outdoor Full color LED Display

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-FD P10
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 3-5 days
- Supply Ability: 3000Sq.m

Product Specification

- Product Name: P6 Outdoor Full Color LED Display
- Pixel Pitch: 6mm
- Module Resolution: 32×32
- Cabinet Resolution: 160×160
- Driving Method: 1/8 Scan
- Driving IC: MBI 5124 IC Or ICN 2038S
- Brightness: 6500 /
- Contrast: 1000:1
- Highlight: **outdoor advertising led display screen**, **outdoor digital signage displays**

for more products please visit us on hdled-display.com

Our Product Introduction

for more products please visit us on hdled-display.com

Product Description

Description:

1. Pure color for R,G,B,more beautiful performance on the picture,video playing.
2. Front access and back access available
3. IP65/IP54 for water proof protection
4. Low consumption for energy saving.
5. Low-noise for quiet fans system
6. Longer lifespan because of the high brightness,low attenuation on the LED chip.
7. High gray scale and high contrast ratio.
8. No gap between the cabinets, seamless assembly.

P6 Outdoor Full color LED Display Specification

NO:	Product Name	Specification
1	Pixel Pitch	6mm
2	Pixel Configuration	1R1G1B/SMD3535
3	Density	27,777 pixel/m2
4	Moduel Size(L×W)mm	192mm×192mm
5	Cabinet Size(L×W×H)mm	960mm×960mm×130mm
6	Module Resolution	32×32
7	Cabinet Resolution	160×160
8	Driving Method	1/8 Scan
9	Driving IC	MBI 5124 IC or ICN 2038S
10	Brightness	6500 /
11	Contrast	1000:1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 810W
14		Average power: 270W
15	Module Weight	0.244kg
16	Color Temperature	9500K—11500K
17	Horizontal Viewing Angle	140º
18	Vertical Viewing Angle	140º
19	Signal Processing	10 or 14bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m,Multimode500m,Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>1920Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65
30		Storage : -40 - 85
31	Environment Temperature	-30 to 60 ; humidity Rh10% to 95%
32	Protection	waterproof, dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

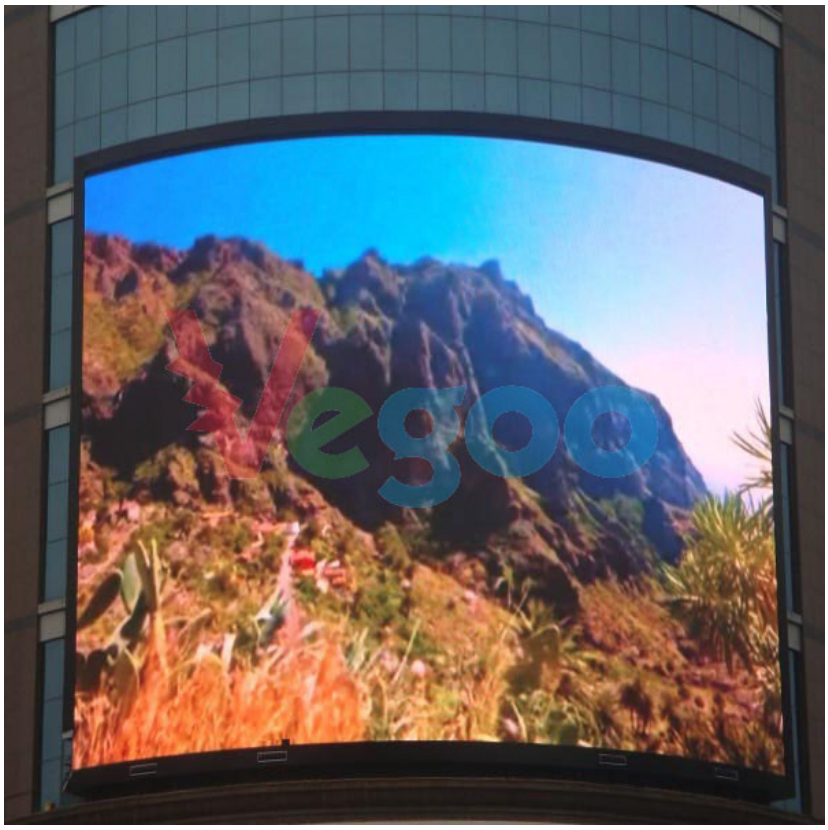

Customer Service

1) Guarantee Time: Within one year after delivery form factory
2) Maintenance Coverage : LED modules,Power supply ,Control system and other accessories (This warranty exclude accessories purchasing form other factory)
3) Maintenance Mode :
By returned maintenance , through express or by other way
4) Response time for maintenance :Return mode: after receiving the returned products, we will repaired them within 24 hours and send them back to the user;Telephone or internet mode: we will contact user within 2 hours after getting informations and give solution within 8 hours;On-site mode: (only for user inside china) after receiving maintenance request , we will respond within 48 hours to user in Guangdong province; 72 hours to user outside Guangdong province, In the case of some special conditions , problems could be solved on the basis of friendly negotiation between two parties.

Shenzhen Weigu Electronic Technology Co., Ltd.

86-15118043086 Linda@vegooled.com hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community,Ma Tian Street,Guangming District , Shenzhen,China