




1/16 Scan MBI5124 P5 Slim Indoor Full Color Outdoor Led Screen Hire 600CD/

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-RD 5
- Minimum Order Quantity: 1 sq.m
- Packaging Details: Flight case
- Delivery Time: 10-15 days
- Supply Ability: 3000sq.m/month

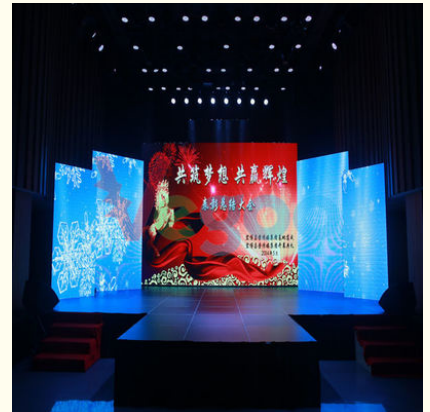

Product Specification

- Product Name: P5 Indoor Full Color LED Display
- Pixel Pitch: 5mm
- Pixel Configuration: 1R1G1B/SMD2121 Black Lamp
- Cabinet Size(L×W×H)mm: 640mm×640mm×90mm
- Brightness: 600CD/
- Contrast: 1000:1
- Highlight: stage rental led display,
outdoor rental led display



Product Description

1/16 Scan MBI5124 P5 Indoor Full color LED Display 600CD/

Product Description

P5 Indoor Full color LED Display is slim and lightweight die-casting aluminum cabinet, assuring fast and easy to do installation. Pixel pitch have 3.9mm, 4.8mm, 6.25mm for option, and can be used indoor and outdoor environment. HD video performance is widely used for stage events, TV show, club, concerts etc.

1. Unique design : the cabinet can be used as ladders to climb .
2. Excellent design should be easy to understood, the product will talk for itself, cancelling the necessity of detailed explain.
3. Seamless stitching: With our special connector design it is easy to reduce gaps while installing, creating a perfect display.

P5 Indoor Full color LED Display Specification

Product Name	Specification
Pixel Pitch	5mm
Pixel Configuration	1R1G1B/SMD2121 Black lamp
Density	40,000 pixel/m ²
Module Size(L×W)mm	320mm×160mm
Cabinet Size(L×W×H)mm	640mm×640mm×90mm
Module Resolution	64×32
Cabinet Resolution	128×128
Driving Method	1/16 Scan
Driving IC	MBI5124
Brightness	600CD/
Contrast	1000:1
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 500W
	Average power: 200W
Module Weight	0.45kg
Color Temperature	9500K—11500K
Horizontal Viewing Angle	140°
Vertical Viewing Angle	140°
Signal Processing	10 or 14bit
Grey Processing	1024×1024×1024 16834×16834×16834
Control Distance	cable100m, Multimode500m, Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
	Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65
	Storage : -40 - 85
Environment Temperature	-30 to 60 ; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
Operating System Platform	WindowsNT, Windows2000, WindowsXP, Windows7
Power Supply	AC 110-220V

Protection	dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)
------------	---

Products exchanged or returned :


we supply our products strictly according to the contract list , if the quantity or specification doesn't meet our contract list, the buyer can give objections within 3 days after received the products , we'll exchanged after company confirmed.

Casual damage situation:

We can provide corresponding fittings without extra fee when improper operation or unexpected artificial damaged arise .

Over Guarantee time :

You only have to pay maintenance cost such as labor costs , spare parts costs and round-trip costs !

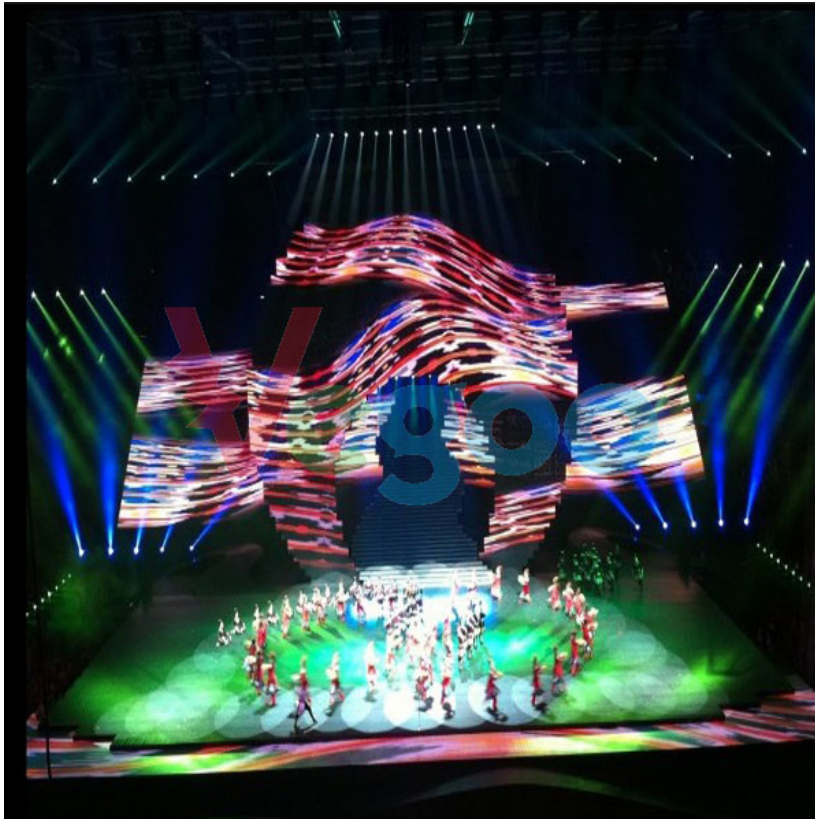

Shenzhen Weigu Electronic Technology Co., Ltd.



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,
Shenzhen, China