



Anti - Static Shockproof P4.8 Led Wall Screen Display Outdoor For Shopping Malls

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-RD 4.8
- Minimum Order Quantity: 1 sq.m
- Packaging Details: Flight case
- Delivery Time: 10-15 days
- Supply Ability: 3000sq.m/month



Product Specification

- Product Name: P4.8 Outdoor Full Color LED Display
- Pixel Pitch: 4.8mm
- Pixel Configuration: 1R1G1B/SMD2727/1921
- Density: 43,200 Pixel/m²
- Moduel Size(L×W)mm: 192mm×192mm
- Cabinet Size(L×W×H)mm: 576mm×576mm×90mm
- Brightness: 4500-4000CD/
- Contrast: 1000:1
- Highlight: stage rental led display, led video wall rental



for more products please visit us on hdled-display.com

Product Description

Anti-static shockproof P4.8 Outdoor Full color LED Display 192mm×192mm

Protection

waterproof, dustproof, high temperature prevention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

Application:

Shopping Malls

Music Venues and Concerts

Big office

Theater and Arts


TV Shows

Car Shows

P4.8 Outdoor Full color LED Display Specification

NO:	Product Name	Specification
1	Pixel Pitch	4.8mm
2	Pixel Configuration	1R1G1B/SMD2727/1921
3	Density	43,200 pixel/m ²
4	Module Size(L×W)mm	192mm×192mm
5	Cabinet Size(L×W×H)mm	576mm×576mm×90mm
6	Module Resolution	40×40
7	Cabinet Resolution	120×120
8	Driving Method	1/10 Scan
9	Driving IC	MBI5124
10	Brightness	4500-4000CD/
11	Contrast	1000:1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 600W
14		Average power: 300W
15	Module Weight	0.208kg
16	Color Temperature	9500K—11500K
17	Horizontal Viewing Angle	140°
18	Vertical Viewing Angle	140°
19	Signal Processing	10 or 14bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m,Multimode500m,Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>1920Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65
30		Storage : -40 - 85
31	Environment Temperature	-30 to 60 ; humidity Rh10% to 95%

32	Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
33	Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
34	Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
35	Power Supply	AC 85-264V
36	Protection	waterproof, dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

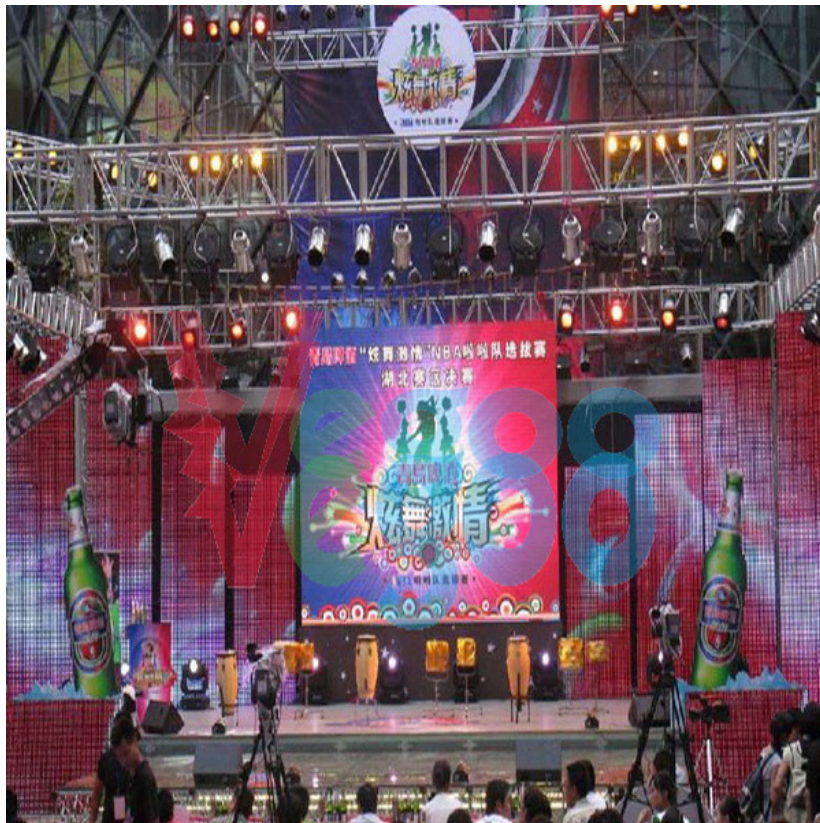

Shenzhen Weigu Electronic Technology Co., Ltd.



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District, Shenzhen, China