



Outdoor Rental LED Display P4.81 Die-Casting Cabinet SMD 1921 Refresh Rate 8000-10000nits For Stage

Our Product Introduction


Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-RD 4.81
- Minimum Order Quantity: 1 sq.m
- Price: Negotiable
- Packaging Details: Flight case
- Delivery Time: 7-25 days
- Supply Ability: 3000sq.m/month



Product Specification

- Pixel Pitch: 4.81mm
- Pixel Configuration: 1R1G1B/SMD2727
- Density: 43,243 Pixel/m2
- Brightness: 3840-7680cd/
- Contrast: 1000:1
- Refresh Rate: 8000-10000nits
- Lamp Beads: MTC1921
- Highlight: stage rental led display, led video wall rental

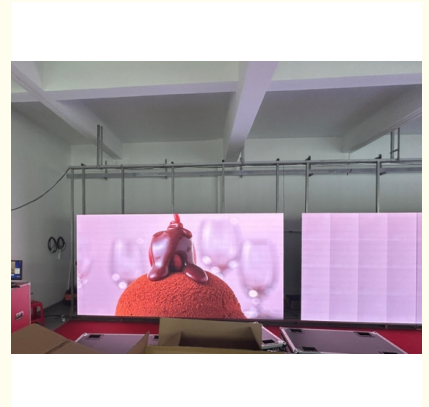

for more products please visit us on hdled-display.com

Product Description

P4.81 Outdoor Full color Rental LED Display 250mm×250mm

Description:

1. color spots or picture shade will be removed through the adjustment of brightness and color by each independent pixel
- 2, adopted with self developed steel structure and special kits will be kept in good flatness and smoothness
- 3, strict water proof testing by Ip65
- 4, according to environmental changes the brightness can be adjusted automatically for energy saving
- 5, special PVC kits are adopted to protect from corrosion according to coastal weather
- 6, according to environmental changes the brightness can be adjusted automatically for energy saving
- 7, auto power on/off, work unattended

P4.81 Outdoor Full color LED Display Specification

NO:	Product Name	Specification
1	Pixel Pitch	4.81mm
2	Pixel Configuration	1R1G1B/SMD2727
3	Density	43,243 pixel/m ²
4	Module Size(L×W)mm	250mm×250mm
5	Cabinet Size(L×W×H)mm	500mm×1000mm×90mm
6	Module Resolution	52×52
7	Cabinet Resolution	104×208
8	Driving Method	1/13 Scan
9	Driving IC	FM6363/SM16380S
10	Brightness	8000-10000cd/
11	Contrast	1000:1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 560W
14		Average power: 320W
15	Module Weight	0.663kg
16	Color Temperature	9500K—11500K
17	Horizontal Viewing Angle	140°
18	Vertical Viewing Angle	140°
19	Signal Processing	10 or 14bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m,Multimode500m,Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>3840Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65 °C
30		Storage : -40 - 85 °C
31	Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
32	Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
33	Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
34	Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7

35	Power Supply	AC 110-220V
36	Protection	waterproof, dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

Service and Guarantees

Services Before-sale:Set a special telephone line to resolve the confusion from clients and supply free technology services by telephone.Consider the demands of clients carefully , study the situation of the installation condition , Team up the related staff and workers promptly , give clients design program details to help them choose the products which they wanted as soon as possible

Service In - sales :Try the best to meet the reasonable demands by clients Provisional changed .Keep close touch with the clients during the period if installation .Cooperate friendly with the clients, satisfy the clients with the best quality of led display .

Service After-sale:Normal products have one year guarantee, and whole life maintenance, free charges . we just charge materials cost only if products out off guarantee.You can down load and upgrade the related operating software of Led display freely from our company website , so as to resolve the problems when you use our led display .Check the quality of appliance , do maintenance job and ask good suggestions form clients on a regular time schedule .



Vegoo 威固电子 Shenzhen Weigu Electronic Technology Co., Ltd.

☎ 86-15118043086

✉ Linda@vegooled.com

🌐 hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District , Shenzhen, China