

## Waterproof Dustproof P5 Outdoor Led Video Display With 140° Viewing Angle

Our Product Introduction

for more products please visit us on [hdled-display.com](http://hdled-display.com)


### Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-RD 6
- Minimum Order Quantity: 1 sq.m
- Packaging Details: Flight case
- Delivery Time: 10-15 days
- Supply Ability: 3000sq.m/month



### Product Specification

- Product Name: P5 Outdoor Full Color LED Display
- Pixel Pitch: 5mm
- Pixel Configuration: 1R1G1B/SMD2727
- Density: 40,000 Pixel/m<sup>2</sup>
- Module Size(L×W)mm: 320mm×160mm
- Cabinet Size(L×W×H)mm: 640mm×640mm×130mm
- Brightness: 6000cd/
- Contrast: 1000:1
- Highlight: stage rental led display, led video wall rental

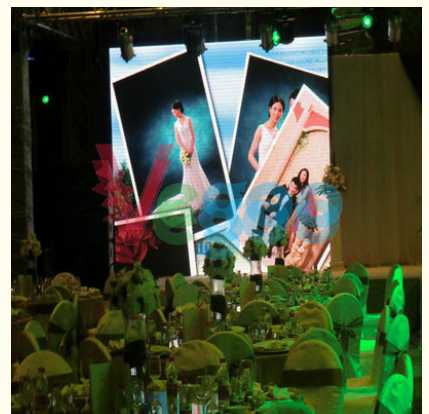

## Product Description

### waterproof dustproof P5 Outdoor Full color LED Display 1R1G1B/SMD2727

#### Quick Detail:

Floor LED screen can bear 1 ton weight

IP65 protection level

ISO9001 production management system

It can be used for any rental application of stage show:such as main screen ,side screen ,floor screen ,arc screen stage design etc.

#### P5 Outdoor Full color LED Display Specification

NO:	Product Name	Specification
1	Pixel Pitch	5mm
2	Pixel Configuration	1R1G1B/SMD2727
3	Density	40,000 pixel/m2
4	Module Size(L×W)mm	320mm×160mm
5	Cabinet Size(L×W×H)mm	640mm×640mm×130mm
6	Module Resolution	64×32
7	Cabinet Resolution	192×192
8	Driving Method	1/8 Scan
9	Driving IC	MBI5124 or ICN 2038S
10	Brightness	6000cd/
11	Contrast	1000:1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 750W
14		Average power: 225W
15	Module Weight	0.28kg
16	Color Temperature	9500K—11500K
17	Horizontal Viewing Angle	140°
18	Vertical Viewing Angle	140°
19	Signal Processing	10 or 14bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m,Multimode500m,Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>1920Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65
30		Storage : -40 - 85
31	Environment Temperature	-30 to 60 ; humidity Rh10% to 95%
32	Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
33	Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
34	Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
35	Power Supply	AC 85-264V
36	Protection	waterproof, dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)



### Company Introduction

Through the ways like cooperation with local customers, set up offices in local, WeiGu LED have set up a batch of after-sales service which can rapidly solve problems. For rapid response, to quickly solve customer problem, personalized solutions. Make the products and services reflect personalized, comprehensive, long cycle, less defects. WeiGu LED is located in Shiyan Town, Baoan district, Shenzhen. Positive response national green environmental protection, energy conservation and emission reduction policy in developing process. We continue to focus on the LED display, striving to become the world's highest cost-effective LED supplier, the solution to the overall service, with the attitude of a new high-speed development in LED display industry.



**Shenzhen Weigu Electronic Technology Co., Ltd.**



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,  
Shenzhen, China