

Commercial Advertising P2.976 Full Color HD LED Display 9500K - 11500K

Basic Information

Place of Origin: ChinaBrand Name: Vegoo

Certification: CE/ROHS/FCC/
 Model Number: VG-HD 2.976
 Minimum Order Quantity: 1Sq.m

• Packaging Details: Plywood case / Flight case / Carton box

Delivery Time: 15 working days
Payment Terms: Western Union, T/T
Supply Ability: 1500Sqm/months



Product Specification

Product Name: P2.976 Indoor Full Color LED Display
 Pixel Configuration: 1R1G1B/SMD2121 Black Lamp

• Density: 112,896 Pixel/m2

Module Resolution: 84×84
Driving Method: 1/28 Scan
Brightness: 1000cd/

Highlight: high definition led display,

commercial advertising led display



Product Description

Commercial advertising P2.976 Indoor Full color LED Display

Description:

- 1. Widely application field and short ROI time. Commercial advertising LED display screen, Stadium perimeter LED display screen, mobile trailer LED display, LED screen for mobile media, shopping mall LED display, screen for logo showing, LED display for bank or stock exchange rate showing, LED moving sign for train and bus station, LED display screen for air port, elecommunication LED display screen for information showing and instruction and ect.
- 2. Clear Vivid image quality displaying. Even in direct and full-on sunlight day to ensure you attract more audience to get short ROI of your LED display screen's investment.


P2.976 Indoor Full color LED Display Specification

Product Name	Specification
Pixel Pitch	2.976mm
Pixel Configuration	1R1G1B/SMD2121 Black lamp
Density	112,896 pixel/m2
Moduel Size(L×W)mm	250mm×250mm
Cabinet Size(L×W×H)mm	500mm×500mm×90mm
Module Resolution	84×84
Cabinet Resolution	168×168
Driving Method	1/28 Scan
Driving IC	MBI5124+2012
Brightness	1000CD/
Contrast	1000:1
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 800W
	Average power: 400W
Module Weight	0.5kg
Color Temperature	9500K—11500K
Horizontal Viewing Angle	140º
Vertical Viewing Angle	140º
Signal Processing	10 or 14bit
Grey Processing	1024×1024×1024 16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>3840Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65 Storage : -40 - 85
Environment Temperature	-30 to 60 ; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 85-264V
Protection Level	IP 41

Services Before-sale:Set a special telephone line to resolve the confusion from clients and supply free technology services by telephone. Consider the demands of clients carefully, study the situation of the installation condition, Team up the related staff and workers promptly, give clients design program details to help them choose the products which they wanted as soon as possible

Service In - sales :Try the best to meet the reasonable demands by clients Provisional changed .Keep close touch with the clients during the period if installation .Cooperate friendly with the clients, satisfy the clients with the best quality of led display .

Service After-sale:Normal products have one year guarantee, and whole life maintenance, free charges . we just charge materials cost only if products out off guarantee. You can down load and upgrade the related operating software of Led display freely from our company website, so as to resolve the problems when you use our led display. Check the quality of appliance, do maintenance job and ask good suggestions form clients on a regular time schedule .

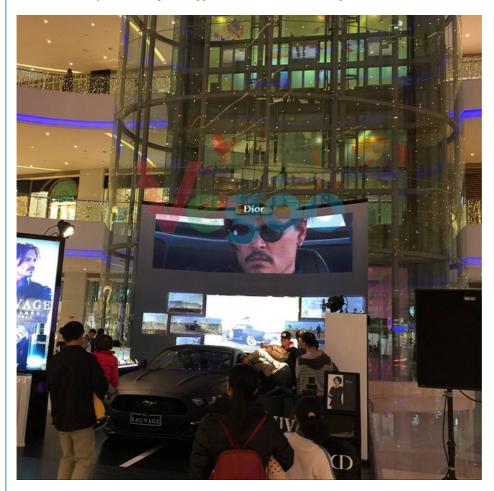



Shenzhen Weigu Electronic Technology Co., Ltd.



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District, Shenzhen, China