




## Advertising Outdoor Video Wall Panels , P4.81 LED Screen Board 1100cd/ Brightness

Our Product Introduction

### Basic Information

- Place of Origin: made in China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC
- Model Number: VG-RD 4.81
- Minimum Order Quantity: 1 sq.m
- Packaging Details: Flight case
- Delivery Time: 10-15 days
- Supply Ability: 3000sq.m/month

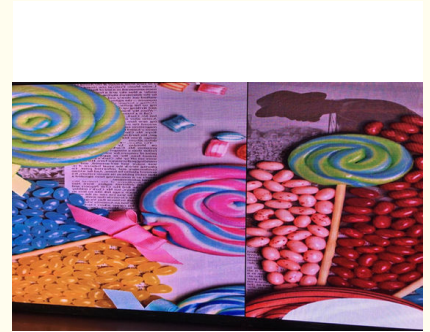

### Product Specification

- Product Name: P4.81 Outdoor LED Video Screen
- Pixel Configuration: 1R1G1B/SMD2121 Black Lamp
- Density: 43,243 Pixel/m<sup>2</sup>
- Cabinet Size(L×W×H)mm: 500×500/1000×90mm
- Brightness: 1100cd/
- Contrast: 1000:1
- Highlight: outdoor advertising led display screen,  
outdoor full color led screen



for more products please visit us on [hdled-display.com](http://hdled-display.com)

**Product Description****OUTDOOR FULL COLOR LED DISPLAY****Advertising outdoor video wall panels P4.81 LED Screen board 1100cd/****Feature:**

1. Video function
2. Text /image/information publish
3. Advertising
4. Safety function
5. Accurate system:no error occurs.
6. Response time :real time.
7. reaction function
8. Remote monitoring –details.
9. Remote and step on powering system

**APPLICATION**

RENTAL DISPLAY  
 INDOOR DISPLAY  
 OUTDOOR DISPLAY  
 TRANSPARENT DISPLAY  
 ACCESSORIES

**MARKET**

DIGITAL BILLBOARD  
 BOARDS/MEETING ROOM  
 MEDIA FACADE  
 SPORT STADIUM ARENA  
 TV STUDIO/BROADCAST  
 EDUCATION TRAINING  
 AIRPORTS  
 LIVE SHOW AND STAGE  
 Retails-Fix-Rental-Led-Display

**P4.81 outdoor Full color LED Display Specification**

Product Name	Specification
Pixel Pitch	4.81mm
Pixel Configuration	1R1G1B/SMD2727
Density	43,243 pixel/m <sup>2</sup>
Module Size(L×W)mm	250mm×250mm
Cabinet Size(L×W×H)mm	500mm×1000mm×90mm
Module Resolution	52×52
Cabinet Resolution	104×208
Driving Method	1/13 Scan
Driving IC	MBI5124
Brightness	1100cd/
Contrast	1000:1

Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 420W
	Average power: 240W
Module Weight	052kg
Color Temperature	9500K—11500K
Horizontal Viewing Angle	140°
Vertical Viewing Angle	140°
Signal Processing	10 or 14bit
Grey Processing	1024×1024×1024 16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
	Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65
	Storage : -40 - 85
Environment Temperature	-30 to 60 ; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 110-220V
Protection	dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)





Send us a quick message about your request.  
We reply back quite fast !



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,  
Shenzhen, China