Advertising Outdoor Video Wall Panels , P4.81 LED Screen Board 1100cd/ Brightness

Our Product Introduction

Basic Information

- Place of Origin: made in China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC
- Model Number: VG-RD 4.81
- Minimum Order Quantity: 1 sq.m
- Packaging Details: Flight case
- Delivery Time: 10-15 days
- Supply Ability: 3000sq.m/month

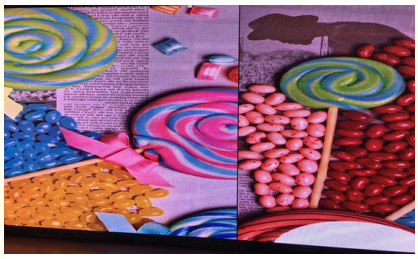

Product Specification

- Product Name: P4.81 Outdoor LED Video Screen
- Pixel Configuration: 1R1G1B/SMD2121 Black Lamp
- Density: 43,243 Pixel/m2
- Cabinet Size(L×W×H)mm: 500×500/1000×90mm
- Brightness: 1100cd/
- Contrast: 1000:1
- Highlight: **outdoor advertising led display screen**, **outdoor full color led screen**

for more products please visit us on hdled-display.com

Our Product Introduction

for more products please visit us on hdled-display.com

Product Description

OUTDOOR FULL COLOR LED DISPLAY

Advertising outdoor video wall panels P4.81 LED Screen board 1100cd/

Feature:

1. Video function

2. Text /image/information publish

3. Advertising

4. Safety function

5. Accurate system:no error occurs.

6. Response time :real time.

7. reaction function

8. Remote monitoring –details.

9. Remote and step on powering system

APPLICATION

RENTAL DISPLAY
INDOOR DISPLAY
OUTDOOR DISPLAY
TRANSPARENT DISPLAY
ACCESSORIES

MARKET

DIGITAL BILLBOARD

BOARDS/MEETING ROOM

MEDIA FACADE

SPORT STADIUM ARENA

TV STUDIO/BROADCAST

EDUCATION TRAINING

AIRPORTS

LIVE SHOW AND STAGE

Retails-Fix-Rental-Led-Display

P4.81 outdoor Full color LED Display Specification

Product Name	Specification
Pixel Pitch	4.81mm
Pixel Configuration	1R1G1B/SMD2727
Density	43,243 pixel/m2
Moduel Size(L×W)mm	250mm×250mm
Cabinet Size(L×W×H)mm	500mm×1000mm×90mm
Module Resolution	52×52
Cabinet Resolution	104×208
Driving Method	1/13 Scan
Driving IC	MBI5124
Brightness	1100cd/
Contrast	1000:1

Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 420W
	Average power: 240W
Module Weight	052kg
Color Temperature	9500K—11500K
Horizontal Viewing Angle	140º
Vertical Viewing Angle	140º
Signal Processing	10 or 14bit
Grey Processing	1024×1024×1024 16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
	Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65
	Storage : -40 - 85
Environment Temperature	-30 to 60 ; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 110-220V
Protection	dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

Send us a quick message about your request.
We reply back quite fast !

86-15118043086 Linda@vegooled.com hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community,Ma Tian Street,Guangming District , Shenzhen,China