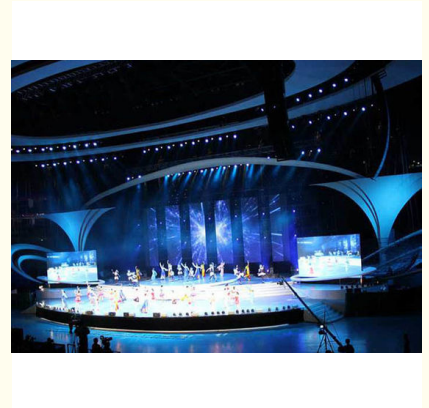# High Refresh Rate Customized HD Indoor Rental Fixed LED Display Video Wall Screens Ultrathin Full Color

Our Product Introduction
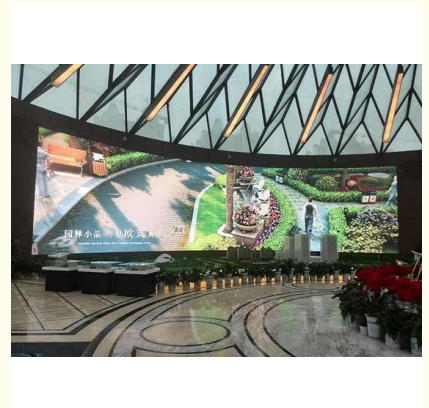
Basic Information

- Place of Origin: CHINA
- Brand Name: VEGOO
- Certification: CE ROHS FCC
- Model Number: VG-SUN88811
- Minimum Order Quantity: Negotiable
- Price: negotiate
- Packaging Details: flight case,polywolden case and carton 6 in 1 case customed
- Delivery Time: 8-15 working day
- Payment Terms: T/T
- Supply Ability: 3000 sqm per month

Product Specification

- Color: Full Color
- Material: Die-casting Aluminium
- Moduel Size(L×W)mm: 320mm×160mm
- Driving IC: MBI5124 Or FM6124
- Brightness: 800CD/
- Cabinet Weight: 25kg / 30kg
- Highlight: **full color led display board, indoor full color led display screen**
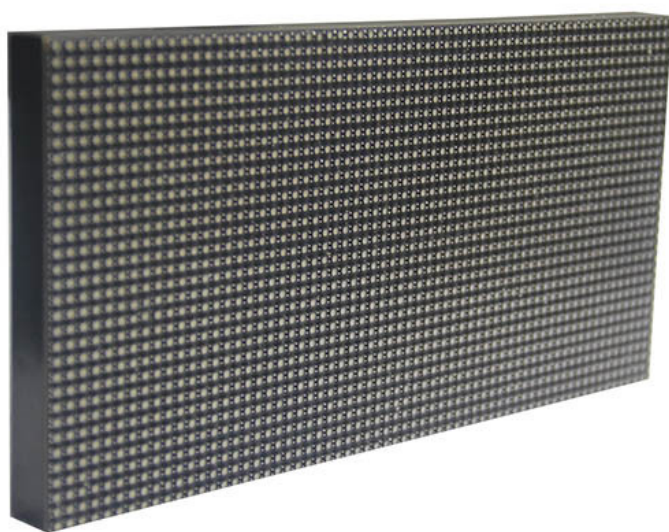
More Images

Product Description

High Refresh Rate Light Weight Customized HD Indoor Rental Fixed LED Display Video Wall Screens Ultrathin full color

P0.9~P10 pixel pitch can be optional

Our advantages:

1.Seamless splicing,the seams between the panels is not visible.
2.No any glare or water wave when the display is working.
3.Customized design,you can choose the LED type,drive IC and material by yourself.what you want,what we will do!
4.Rental LED cabinet is easy and convenient to install,low labour cost and operating cost for installation,easy to remove.
5.Low-Consumption,save energy and good heat dissipation.
6.Good show quality as the color uniformity and color reducibility.

P5 Indoor Full color LED Display Specification

NO:	Product Name	Specification
1	Pixel Pitch	5mm
2	Pixel Configuration	1R1G1B/SMD2121 Black lamp
3	Density	40,000 pixel/m2
4	Moduel Size(L×W)mm	320mm×160mm

5	Cabinet Size(L×W×H)mm	640mm×640mm or 960mm×960mm×100mm
6	Module Resolution	64×32
7	Cabinet Resolution	128×128 or 192×192
8	Driving Method	1/16 Scan
9	Driving IC	MBI5124 or FM6124
10	Brightness	800CD/
11	Contrast	1000:1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 545W
14		Average power: 273W
15	Cabinet Weight	25kg / 30kg
16	Color Temperature	2000K—9500K
17	Horizontal Viewing Angle	140º
18	Vertical Viewing Angle	140º
19	Signal Processing	16bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m,Multimode500m,Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>1920Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65
30		Storage : -40 - 85
31	Environment Temperature	-30 to 60 ; humidity Rh10% to 95%
32	Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
33	Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
34	Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
35	Power Supply	AC 110-220V/5V60Hz
36	Protection Level	IP 45

Our service:

Consider the demands of clients carefully , study the situation of the installation condition , Team up the related staff and workers promptly , give clients design program details to help them choose the products which they wanted as soon as possible

Service In - sales :
Try the best to meet the reasonable demands by clients provisional changed .
Keep close touch with the clients during the period of installation .
Cooperate friendly with the clients, satisfy the clients with the best quality of led display .

Service After-sale:
General products have one year guarantee, and wholelife maintenance for free charges . we just charge material cost when products are out off guarantee peried.
You can download and upgrade the related operating software of Led display freely from our company website , so as to resolve the problems when you use our led display .
Check the quality of appliance , do maintenance job and ask good suggestions from clients on a regular time schedule .

Customer Service
1) Guarantee Time: Within one year after delivery from factory
2) Maintenance Coverage : LED modules,Power supply ,Control system and other accessories (This warranty exclude accessories purchasing form other factory)
3) Maintenance Mode :
By returned maintenance , through express or other way
4) Response time for maintenance :
Return mode: after receiving the returned products, we will repaired them within 24 hours and send them back to the user;
Telephone or internet mode: we will contact user within 2 hours after getting informations and give solution within 8 hours;
On-site mode: (only for user inside china) after receiving maintenance request , we will respond within 48 hours to user in

Guangdong province; 72 hours to user outside Guangdong province, In the case of some special conditions , problems could be solved on the basis of friendly negotiation between two parties.