

# Small Pixel Pitch Indoor P6 Rental Led Display Screen Video Wall Die-Casting Aluminium

## **Basic Information**

Place of Origin: CHINABrand Name: VEGOO

Certification: CE ROHS FCC CCCModel Number: VG-SUN88890

Minimum Order Quantity: 1 SQM Price: negotiate

Packaging Details: flight case,plywood case,carton

• Delivery Time: 15-30 working days

Payment Terms: T/T

Supply Ability: 3000 sqm per month



# **Product Specification**

• Pixel Pitch: 6mm

• Density: 27,777 Pixel/m2

• Cabinet Size: 576mm×576mm×90mm

Cabinet Resolution: 96×96
Driving IC: MBI5124
Cabinet Weight: 7.5kg

Highlight: Indoor P6 Rental Led Display Screen,
 Small Pixel Pitch Led Display Screen



# More Images



## **Product Description**

Small Pixel Pitch Indoor P6 Rental Led Display Screen Video Wall Die-Casting Aluminium

#### **Product detail**

#### 1.Assembled with Lightweight Modules

The display is assembled with lightweight modules, making it easy to transport and install. No skills and special tools are required to install it. The 576x576mm cabinet is assembled using nine 192x192mm modules and aluminum cabinet. Full module is superlight.

#### 2.Standard Cabinet Dimensions

The ultra-lightweight cabinet made is aluminum alloy which gives it extra strength. The cabinet of P6 Concert LED Screen is designed with perfection, making it really easy to install. Also, the quick-lock feature requires no technical skills to install and uninstall.


## 3.P6 Concert LED Screen

The advanced assembled structure produces seamless display and visual effects, offering you the perfect visual performance you desire from your LED display. The display can be used at banks, indoor stages, concert halls, station, summit rooms, exhibition and theatres etc.

#### P6 Indoor Full color LED Display Specification

Product Name	Specification
Pixel Pitch	6mm
Pixel Configuration	1R1G1B/SMD3528 White lamp
Density	27,777 pixel/m2
Moduel Size(L×W)mm	192mm×192mm
Cabinet Size(L×W×H)mm	576mm×576mm×90mm
Module Resolution	32×32
Cabinet Resolution	96×96
Driving Method	1/16 Scan
Driving IC	MBI5124
Brightness	1000cd/
Contrast	1000:1
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 400W
	Average power: 200W
Cabinet Weight	7.5kg
Color Temperature	2000K—9500K
Horizontal Viewing Angle	140º
Vertical Viewing Angle	140º
Signal Processing	16bit
Grey Processing	1024×1024×1024 16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65
	Storage : -40 - 85
Environment Temperature	-30 to 60 ; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)

Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 110-220V/5V60Hz
Protection Level	IP 45

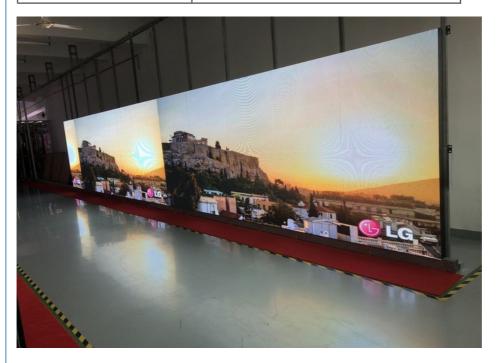

#### **Company information**

We are a company with a professional display trade team. It is our mission to provide professional and leading control system solutions for the industry, to enhance the competitiveness of products and brands and market value for customers. We hope that within one year, through our team's professional technology, innovative thinking, enterprising spirit, cooperative relationship, win-win attitude, to make the display screen more beautiful, more intelligent, and strive to become a global leader in the field of LED display control.

## **Shipping**

Flight case: has wheels and handles which is for the rental use led display, to make the transportation be very convenient and protect the led display better..if your led display screen system is for the rental use, please choose the flight case for your led display screen



Shenzhen Weigu Electronic Technology Co., Ltd.



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District, Shenzhen, China