


Creative P3.91 Curved Rental LED Display For Events Broadcasting And Advertising With High Refresh Rate

Our Product Introduction

for more products please visit us on hdled-display.com

Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/CCC
- Model Number: VG-RENTAL-P3.9
- Minimum Order Quantity: 1
- Price: Negotiation
- Packaging Details: Flight case/Wooden case
- Delivery Time: 7-15 days
- Payment Terms: T/T in advance(50% deposit)
- Supply Ability: negotiation

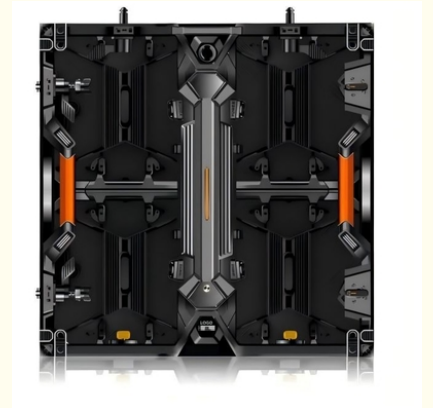

Product Specification

- Ip Grade: IP43
- Grey Level: 12-14 Bit
- Moduel Size: 250*250
- Cabinet Material: Die-casting Aluminum
- Highlight: **Curved Rental LED Display, Events Broadcasting Rental LED Display, High Refresh Rate Rental LED Display**



More Images



Product Description

Curved rental P3.91 indoor exhibition art show product can widely use in many fields, which can attract visitors' or clients' attention.

Features

1. Die-casting aluminum, low temp-rise
2. High refresh, low light high gray
3. High precision, seamless splicing
4. No fan, muted design, noise-free
5. Low power, Eco-friendly

Key Features

- **Resolution:** The P3.91 refers to a pixel pitch of 3.91mm, providing a high-quality image suitable for close viewing.
- **Cabinet Size:** Each cabinet measures 500x500mm, making it easy to configure and transport.
- **Refresh Rate:** With a refresh rate of 3840Hz, the display ensures smooth video playback, reducing flicker and enhancing visual quality, especially in video content.
- **Curved Design Support:** The display can be configured in various shapes, including curved designs, allowing for creative installations that can fit various architectural needs.

Applications

- **Events and Concerts:** Ideal for live performances, festivals, and corporate events.
- **Broadcasting:** Suitable for television studios and live broadcasts where high-quality visuals are essential.
- **Advertising:** Effective for marketing displays in shopping malls and public spaces.


Installation and Maintenance

- **Modular Design:** The modular nature of the cabinets allows for easy assembly and disassembly, facilitating quick setups and takedowns.
- **Maintenance:** Designed for easy access to components, reducing downtime for repairs or maintenance.

Product Parameters

Module Parameter Table						
Part Number	I-P2.6	I-P2.84	I-P3.91	O-P3.47	O-P3.91	O-P4.81
Pixel Pitch	2.6mm	2.84mm	3.91mm	3.47mm	3.91mm	4.81mm
LED Configuration	SMD1515	SMD1515	SMD2121	SMD1921	SMD1921	SMD1921
Pixel Density	147456dot/m ²	123904dot/m ²	65536dot/m ²	82944dot/m ²	65536dot/m ²	43264dot/m ²
Resolution of module	96*96dot	88*88dot	64*64dot	72*72dot	64*64dot	52*52dot
Module size	250*250mm	250*250mm	250*250mm	250*250mm	250*250mm	250*250mm
Box specification	500*500*80*88mm	500*500*88mm	500*500*88mm	500*500*88mm	500*500*88mm	500*500*88mm
Cabinet weight	7.2kg/箱	7.2kg/箱	7.2kg/箱	7.5kg/箱	7.5kg/箱	7.5kg/箱
IP Rating (front/back)	IP30	IP30	IP30	IP65	IP65	IP65
Scanning Mode	32S	30S	16S	18S	16S	13S
Brightness Intensity	800CD/m ²	800CD/m ²	800CD/m ²	5000CD/m ²	4500CD/m ²	4500CD/m ²
Viewing Angle	140°	140°	140°	140°	140°	140°
View Distance	3m	3m	4m	4m	4m	5m
Gray Scale	14bit	14bit	14bit	14bit	14bit	14bit
Display Scale	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M
Max.Power Consumption	550 W/m ²	460W/m ²	400 W/m ²	600W/m ²	600W/m ²	580W/m ²
Ave.Power Consumption	200 W/m ²	160 W/m ²	150 W/m ²	200 W/m ²	200W/m ²	180W/m ²

POWER MODELS

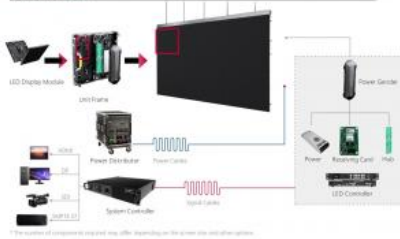

*The system components required may differ depending on the screen size and other options.

APPLICATIONS



*System application

SPECIFICATIONS

Parameter	Value							
Model	VSD5.8	VSD5.8	VSD5.8	VSD5.8	VSD5.8	VSD5.8	VSD5.8	VSD5.8
Panel Pitch	5.8mm	5.8mm	5.8mm	5.8mm	5.8mm	5.8mm	5.8mm	5.8mm
Resolution	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080
LED Type	SMD 2835							
Brightness	1800cd/m²	1800cd/m²	1800cd/m²	1800cd/m²	1800cd/m²	1800cd/m²	1800cd/m²	1800cd/m²
Panel Density	144000dots/m²	144000dots/m²	144000dots/m²	144000dots/m²	144000dots/m²	144000dots/m²	144000dots/m²	144000dots/m²
Module Size (mm)	500mm x 500mm x 16mm							
Panel Size	1000mm x 1000mm x 16mm							
Panel Resolution	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080
Panel Weight	7.2kg	7.2kg	7.2kg	7.2kg	7.2kg	7.2kg	7.2kg	7.2kg
Material	Die-cast Aluminum							
Ingress Protection	IP65							
Operating Temperature / Humidity	-10°C to 45°C / 10%~80%							
Mounting	Front/Backmount							
Viewing Angle (H/V)	140°/120°							
Contrast Ratio	3000:1							
Input Power	4.8W/m²							
Power Factor	0.95							
Refresh Rate	3840Hz							
Input Voltage	100-240VAC							
Input Power	50-60W							
Mounting/Viewing	Rear/Backmount							
Configuration	25.6k/Panel/PC							

DIMENSIONS



*Dimensions are subject to change without notice.

